

SF680(P)



**Mounting Pattern**  
1100 x 650mm  
(43.29" x 25.59")



**Max Load**  
350lb  
(158kg)



**SMARTMOUNT.**

# Universal Flat Wall Mount

FOR 60" TO 98" DISPLAYS\*

Peerless-AV's SmartMount® Universal Flat Wall Mount delivers an ultra-slim profile designed to hold large displays up to 350lb. Installation and maintenance are made easy with the SF680's robust feature set. Auto-latching adaptor rails automatically secure the display without the use of a tool. The mount's built-in kickstand holds the display safely from the wall during cable routing, while the open wall plate allows for increased electrical and cable management options. Horizontal and vertical display adjustment allow for quick fine-tuning of the mounted display.

- Universal mount fits displays with mounting patterns up to 1100 x 650mm (43.29" W x 25.59" H)
- Low-profile design holds display only 1.73" (44mm) from the wall
- Easy hang wall plate allows a bolt to be pre-installed to ease wall plate installation
- Lateral display adjustment up to 19.25" (489mm)
- 1" of post-installation vertical adjustment provides flexibility in the installation
- Includes fastener pack with all necessary mounting and display attachment hardware (including M10)
- For mounts requiring theft resistant hardware, installed with security tool (included), please purchase SF680
- For mounts requiring standard hardware, installed with a Philips screwdriver, please purchase SF680P

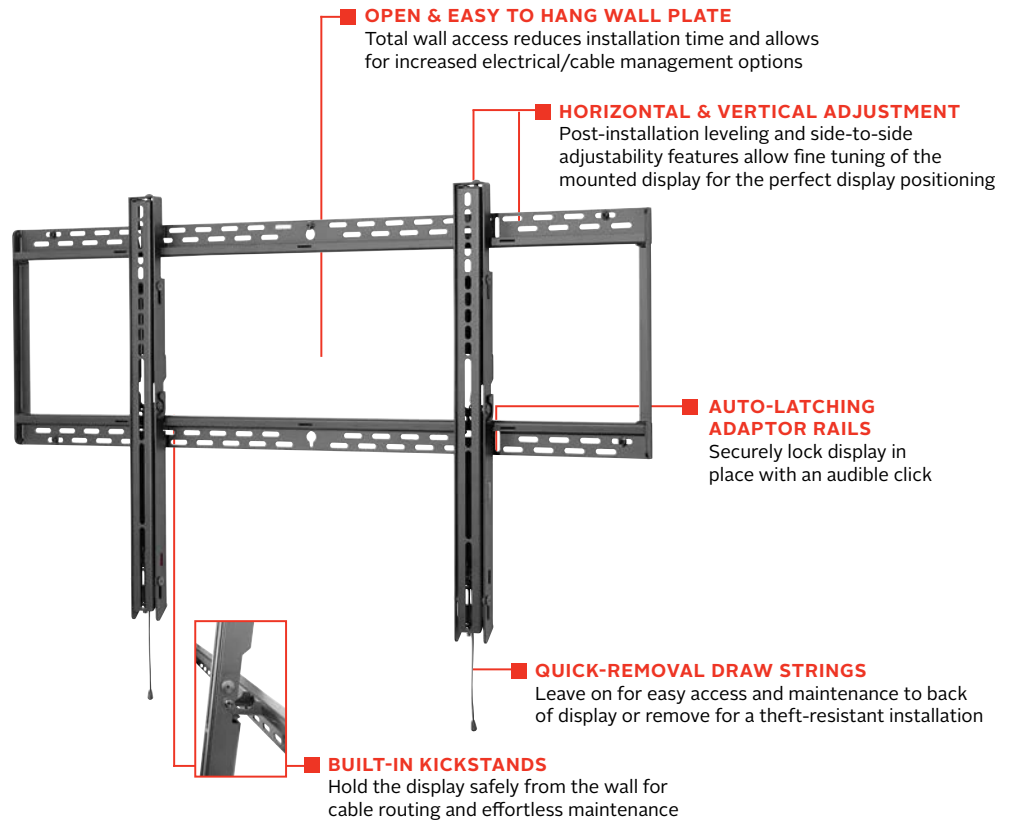

Low-profile design for a sleek, yet compact installation.



Comes in color packaging with included installation hardware and easy to follow instructions.



\*This display size range is simply a guideline for product selection. Displays larger than the screen size range may still be compatible as long as they fall within the VESA® pattern and max weight of the Peerless-AV® product.

SF680P	SmartMount® Universal Flat Wall Mount for 60" to 98" Displays - Standard Models
SF680	SmartMount® Universal Flat Wall Mount for 60" to 98" Displays - Security Models

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SF680(P)	45.75" x 27.48" x 1.73" (1162 x 698 x 44mm)	17.30lb (7.8kg)	350lb (158kg)	Scratch Resistant Fused Epoxy	Semi-Gloss Black


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SF680(P)	46.70" x 2.30" x 15.40" (1185 x 58 x 390mm)	20.30lb (9.21kg)	SF680: 735029242239 SF680P: 735029242246	Wall Mount, Wall and Display Installation Hardware, Installation Instructions	1

Accessories

- ACC615:** 6-pack Metal Stud Fastener Kit
- ACC309:** Video Conference Shelf
- ACC-UCM:** Universal AV Component Mount
- ESHV models:** AV Wall Shelves
- IBA4-W:** Easy Mount Recessed Low Voltage Cable Plate

All dimensions = inch (mm)

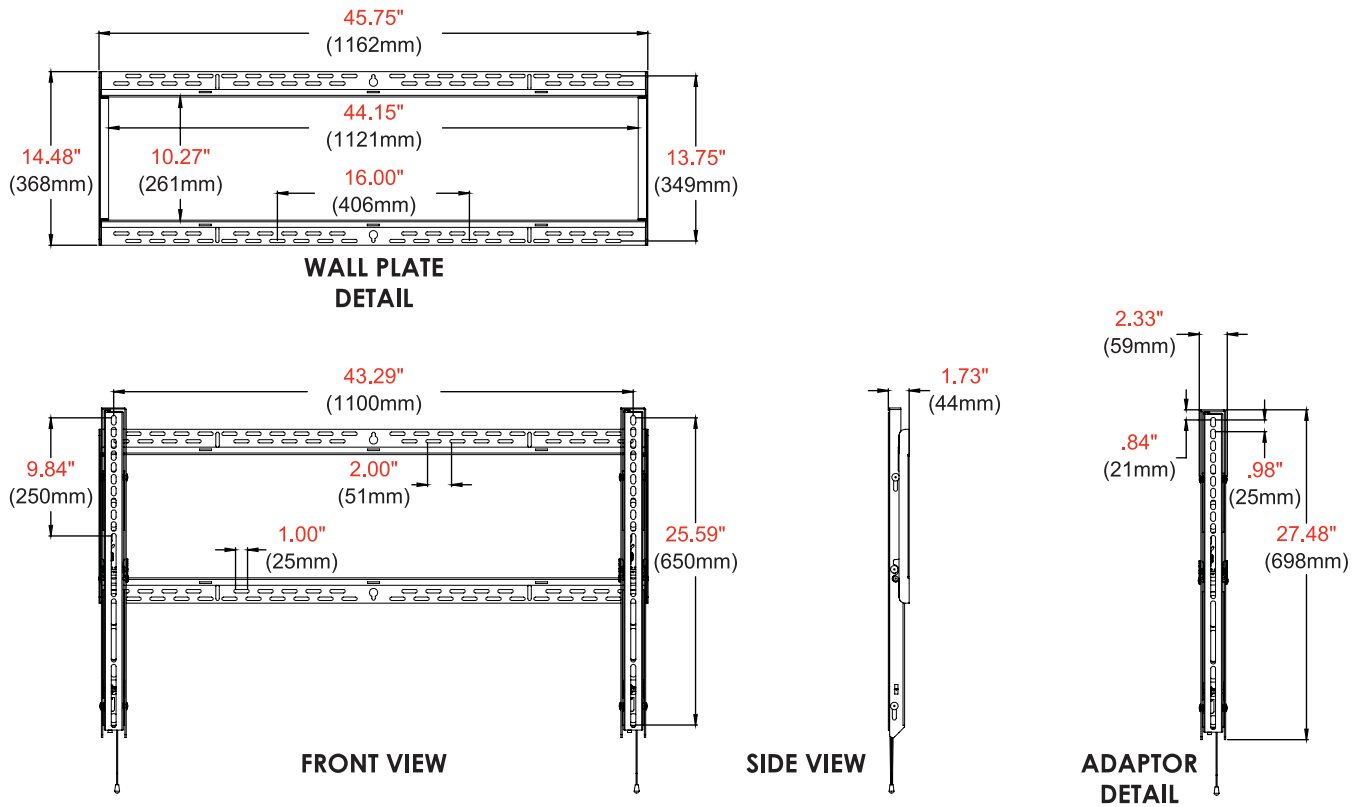

Architect Specifications

The SmartMount® Universal Flat Wall Mount shall be a Peerless-AV model SF680(P) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.



Contact a Connection Account Manager for more information.  
1.800.800.0014 ■ [www.connection.com/ConferenceRoomTech](http://www.connection.com/ConferenceRoomTech)

